BOOSTING LLM TRANSLATION SKILLS WITHOUT GENERAL ABILITY LOSS VIA RATIONALE DISTILLATION

Junhong Wu^{1,2}, Yang Zhao^{1,2}, Yangyifan Xu^{1,2}, Bing Liu³, Chengqing Zong^{1,2*}

ABSTRACT

Large Language Models (LLMs) have achieved impressive results across numerous NLP tasks but still encounter difficulties in machine translation. Traditional methods to improve translation have typically involved fine-tuning LLMs using parallel corpora. However, vanilla fine-tuning often leads to catastrophic forgetting of the instruction-following capabilities and alignment with human preferences, compromising their broad general abilities and introducing potential security risks. These abilities, which are developed using proprietary and unavailable training data, make existing continual instruction tuning methods ineffective. To overcome this issue, we propose a novel approach called **RaDis** (**Rationale Distillation**). RaDis harnesses the strong generative capabilities of LLMs to create rationales for training data, which are then "replayed" to prevent forgetting. These rationales encapsulate general knowledge and safety principles, acting as self-distillation targets to regulate the training process. By jointly training on both reference translations and self-generated rationales, the model can learn new translation skills while preserving its overall general abilities. Extensive experiments demonstrate that our method enhances machine translation performance while maintaining the broader capabilities of LLMs across other tasks. This work presents a pathway for creating more versatile LLMs that excel in specialized tasks without compromising generality and safety.

1 Introduction

Large Language Models (LLMs) have demonstrated exceptional performance across diverse Natural Language Processing (NLP) tasks. However, in the realm of Machine Translation (MT), they still fall short compared to conventional supervised encoder-decoder models (Xu et al., 2024a). Recent studies have sought to enhance the translation performance of LLMs through continual instruction-tuning with parallel corpora (Yang et al., 2023; Xu et al., 2024a). While this approach effectively boosts translation performance, it often comes at the cost of the inherent general ability and safety alignment of LLMs. As illustrated in Figure 1, fine-tuning LLaMA-2-Chat and Mistral-v0.2-Instruct results in a significant decline in these models' performance on MT-Bench (Zheng et al., 2023). This phenomenon is known as Catastrophic Forgetting (CF) (French, 1993), which remains the major obstacle to developing models that seamlessly integrate strong translation performance with broader general-purpose utility.

Various Continual Learning (CL) approaches have been proposed to mitigate CF (Chen & Liu, 2018). In the context of LLMs, replay-based methods (Scialom et al., 2022; Yin et al., 2022; Mok et al., 2023; He et al., 2024), which store small subsets of previous data for rehearsal, are often favored for their simplicity and effectiveness. However, a critical limitation of replay-based methods

¹School of Artificial Intelligence, University of Chinese Academy of Sciences

²Institute of Automation, Chinese Academy of Sciences

³Department of Computer Science, University of Illinois at Chicago {wujunhong2021, xuyangyifan2021}@ia.ac.cn, liub@uic.edu {yang.zhao, cqzong}@nlpr.ia.ac.cn

^{*}Corresponding author.

is their reliance on access to the original training data, which is frequently unavailable in real-world applications. This limitation greatly reduces their feasibility in scenarios like the one in this paper, where the goal is to boost translation skills while preserving the general abilities of open-sourced LLMs, which are gained from proprietary, in-house data. Some studies have incorporated open-source general instruction-following data as a substitute (Jiao et al., 2023; Zhang et al., 2023). However, the limited quality of these open-source datasets results in performance that significantly falls short of instruction-tuned LLMs.

To address this problem, this paper explores leveraging the strong generative ability of LLMs to synthesize their own replay data. However, given the vast task space of LLMs and the limited data we could use, generating high-quality synthesis data that encapsulates diverse general knowledge remains a non-trivial question. We draw inspiration from an observation that instruction-tuned LLMs are capable of generating detailed rationales when tasked with translation requests (see Section 3.1 and Appendix C for more details). Previous studies in the reasoning field suggest that rationales generated by LLMs contain valuable knowledge and can be used to distill reasoning abilities (Wadhwa et al., 2024; Xu et al., 2024b). In line with these findings, we show that selfgenerated rationales encapsulate the internal general knowledge leveraged during translation and thus can be utilized as replay data to preserve general abilities in a self-distillation manner.

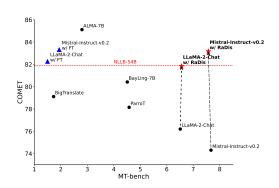


Figure 1: Translation performance (COMET) and general conversational and instruction-following ability (MT-Bench). While both Fine-tuning (blue triangle) and RaDis (red star) greatly enhance the translation performance, RaDis helps preserve most of the models' general ability.

Thus, we propose a novel training method named **RaDis** (**Ra**tionale **Dis**tillation). It prompts the LLM to generate rationales for the reference translations in original training data, and then concatenates references and rationales, forming an enriched dataset for subsequent training. By incorporating both the rationales and the references into the training, RaDis bridges the general knowledge gap often found in vanilla fine-tuning and introduces a self-distillation loss on the rationale, thereby mitigating the forgetting issue.

Comprehensive experiments using two widely adopted LLMs, LLaMA-2-7B-Chat (Touvron et al., 2023) and Mistral-7B-Instruct-v0.2 (Jiang et al., 2023) validates the effectiveness of RaDis. As depicted in Figure 1, RaDis enhances translation performance by 5.6 and 8.9 COMET points, respectively, while preserving the models' original performance on general ability benchmarks. Further analysis reveals that distilling self-generated rationales not only outperforms distilling from external rationales generated by a much stronger model but also avoids the conflict between learning new tasks and consolidating the original ability. Together, these findings offer additional insights into RaDis' effectiveness and future study.

In summary, this work makes the following contributions:

- It addresses the problem of CL for instruction-tuned LLMs and discovers that LLMs can generate rationales encapsulating the internal general knowledge. Replaying these rationales effectively mitigates forgetting in a self-distillation manner.
- It proposes RaDis, a novel training approach that enhances LLMs' translation proficiency while preserving their generality by distilling self-generated rationales. Comprehensive experiments on LLaMA-2-Chat and Mistral-Instruct-v0.2 demonstrate its effectiveness.
- Further analysis demonstrates that the self-generated nature of the rationales is the key
 to RaDis' effectiveness. Additionally, RaDis avoids the conflict between learning new
 tasks and consolidating the original capabilities. These findings provide valuable insights
 for developing more flexible and powerful LLMs that excel in specialized tasks without
 compromising their generality or safety.

2 RELATED WORKS

2.1 Fine-tuning LLMs for MT

Previous studies have primarily fine-tuned LLMs using parallel corpora to enhance their translation proficiency. BigTrans (Yang et al., 2023) and ALMA (Xu et al., 2024a) propose to first continual pre-train on monolingual data and then progresses to fine-tuning on parallel data. Although these methods enhance the translation proficiency of LLMs, they often compromise the models' general ability, turning them into specialized translation models. To address this issue, several studies have sought to preserve the general ability of LLMs while fine-tuning them for MT. For example, ParroT (Jiao et al., 2023) and BayLing (Zhang et al., 2023) incorporates general instruction-following data to maintain general capability. However, limited by the quality of the data, their performance in both translation and general abilities remains relatively low. In contrast to these efforts, our approach solely utilizes machine translation data and preserves the general ability by distillation of self-generated rationales.

2.2 CONTINUAL INSTRUCTION TUNING

Continual instruction tuning (CIT) seeks to mitigate CF during the instruction tuning of LLMs by employing CL approaches (Wu et al., 2024; Shi et al., 2024). Traditional CL methods are typically divided into replay-based, regularization-based, and architecture-based methods. However, in the context of LLMs, the vast parameter and task space reduces the feasibility of regularization-based and architecture-based methods (Wang et al., 2024). As a result, current research has predominantly relied on focused on replay-based techniques and their variants (Scialom et al., 2022; Yin et al., 2022; Mok et al., 2023; He et al., 2024; Wang et al., 2024) While these approaches are promising, they are subject to the reliance on access to the original training data. Consequently, they cannot be applied to mitigate the forgetting of instruction-tuned LLMs' general abilities gained from inhouse training data. SDFT (Yang et al., 2024) is the first work designed for preserving the general instruction-following abilities of LLMs. It proposes to paraphrase the original train dataset with the LLM itself to bridge the distribution gap. However, the quality of the paraphrased data is limited by the capabilities of the prompt and the model itself, which may diminish the performance of the task to be learned. In contrast, RaDis argues the original data with self-generated rationales and avoids loss of performance on new tasks.

2.3 DISTILLING RATIONALES

Since the advent of LLMs, researchers have recognized their ability to generate rationales and have sought to distill knowledge from them. Initial studies have predominately focused on distilling the Chain of Thought (CoT) reasoning capabilities from intermediate rationales (Wang et al., 2023; Hsieh et al., 2023; Fu et al., 2023). These studies emphasize *pre-rationalization*, where the model first generates a rationale before predicting the answer based on that rationale. Here, the rationale reflects the reasoning path leading to the final answer, providing valuable insights for student models. Recent research has proposed *post-rationalization*, where the rationale is generated after the answer is predicted. In this context, the rationale serves as an explanation, supplementing the ground truth label. Wadhwa et al. (2024) demonstrate that CoT-augmented distillation is more effective when rationales are provided after labels. Additionally, Xu et al. (2024b) suggests that *post-rationalization* mitigates rationale sensitivity issues and enhances focus on learning challenging samples. RationaleCL (Xiong et al., 2023) introduce rationales generated by GPT-3.5-turbo to distill relation extraction knowledge into T5 model in a continual learning setting. Unlike previous works that distill knowledge from LLMs to smaller student models, RaDis focuses on self-distillation to maintain general abilities and prevent forgetting.

3 Method

We begin by presenting a key observation: when tasked with translation requests, instruction-tuned LLMs can generate detailed **rationales** that encapsulate the internal general knowledge leveraged during translation (Section 3.1). Building on this insight, we introduce **Ra**tionale **Dis**tillation (RaDis), which leverages these self-generated rationales as replay data to help the model retain its

broad general capabilities (Section 3.2). Finally, we demonstrate that the RaDis training objective can be decomposed into a conventional MT loss and a self-distillation loss on rationale tokens, which helps prevent excessive deviation of model parameters (Section 3.3).

3.1 OBSERVATION: SELF-GENERATED RATIONALES

Instruction-tuned LLMs exhibit a strong ability to follow instructions and engage in conversational interactions, delivering helpful responses across a wide range of tasks. Unlike conventional models that simply output the answer, instruction-tuned LLMs are known to be able to generate rationales (Wei et al., 2022). As illustrated in Figure 2, when presented with a translation request, instruction-tuned LLMs not only generate the translation but also provide an accompanying rationale. For 139 out of 200 randomly sampled translation instructions, LLaMA-2-7B-Chat provided a translation along with a rationale. In line with findings in CoT-augmented distillation (Wadhwa et al., 2024; Xu et al., 2024b), we found these rationales encompass a wealth of diverse information leveraged during translation, including word or phrase translations, sentence structure analysis, factual information about the sen-



Figure 2: An example of LLM's response to translation instruction. In this case, the LLM provides a rationale with additional factual information about the term 'Belt and Road' after the translation result.

tence, explanations of the overall sentence meaning, and other details.

3.2 RADIS: DISTILLING RATIONALES TO ALLEVIATE FORGETTING

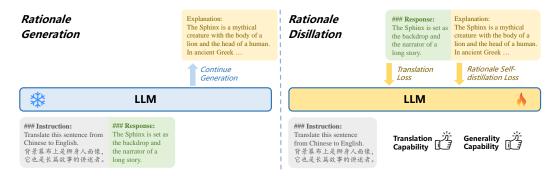


Figure 3: Overview of the RaDis approach. **Rationale Generating (Left)**: Given a translation instruction-response pair as an input, the LLM extends the response by generating a rationale. **Fine-tuning with Rationale Distillation (Right)**: RaDis utilizes this self-generated rationale to enrich the original response and fine-tunes the LLM with the enriched data. The CLM loss computed on the rationale serves as a self-distillation regularization term, preventing excessive parameter divergence.

The forgetting issue can be attributed to an unsuitable training approach. In conventional fine-tuning, the supervision signal comes from the reference sentence solely, which contains knowledge specific to the translation task. Thus, the model parameter is biased to a translation-specific distribution. Previous studies have sought to address this issue by replay-based CL methods. However, due to the absence of original training data and the poor quality of open-sourced instruction-following data, their effectiveness is limited. To this end, we propose RaDis.

The core idea of RaDis is similar to *pseudo-replay*. In traditional CL, pseudo-replay methods employ an additional data generator to synthesize replay data (Shi et al., 2024). However, the superior generative abilities of LLMs now allow us to *leverage the model itself to synthesize this replay data*.

As depicted in Figure 3, RaDis starts from an instruction-tuned LLM as the backbone. It utilizes a prompt template \mathcal{I} to format the translation sentence pair (x, y) and sends them into the backbone LLM parameterized as θ . As shown in Section 3.1, an instruction-tuned model has the inherent ability to continue generating a rationale using the translation instruction-response pair as the prefix.

$$\mathbf{r} \sim P(\mathbf{y}, \mathbf{x}, \mathcal{I}; \theta)$$
 (1)

These rationales encapsulate the internal general knowledge leveraged during translation, making them an ideal substitute for replay data. Specifically, the self-generated rationale ${\bf r}$ is concatenated with the translation sentence ${\bf y}$, creating an enriched response $\hat{{\bf y}} = \text{CONCAT}({\bf y},{\bf r})$. The enriched instruction-response pair is subsequently used to train the backbone LLM using a standard causal language model (CLM) loss, defined as:

$$\mathcal{L}(\mathbf{x}, \hat{\mathbf{y}}; \theta) = -\log P(\hat{\mathbf{y}}|\mathbf{x}, \mathcal{I}; \theta)$$
(2)

The enriched response now incorporates both the task-specific knowledge for translation and the diverse, original knowledge embedded within the self-generated rationale. As a result, fine-tuning the model with it can learn the translation task and consolidate the original general ability simultaneously.

3.3 Why Radis Works: A Knowledge Distillation Perspective

In previous sections, we discovered that self-generated rationales are effective substitutes for replay data. However, since they are neither traditional replay data nor pseudo-replay data, a natural question arises: why do they work? Here, we demonstrate that RaDis can be understood as a form of knowledge distillation, a technique proven to mitigate forgetting. To explain this, we paraphrase Equation 2 as:

$$\mathcal{L}(\mathbf{x}, \hat{\mathbf{y}}; \theta) = -\log P(\hat{\mathbf{y}} | \mathbf{x}, \mathcal{I}; \theta)$$

$$= -\sum_{t=1}^{T+R} P(\hat{\mathbf{y}}_t | \hat{\mathbf{y}}_{< t}, \mathbf{x}, \mathcal{I}; \theta)$$
(3)

where R is the length of the rationale \mathbf{r} . The properties of the CLM loss allow us to split and reassemble the loss across each token. By separating the loss of the reference translation from the self-generated rationale, we obtain:

$$\mathcal{L}(\mathbf{x}, \hat{\mathbf{y}}; \theta) = -\sum_{t=1}^{T+R} P(\hat{\mathbf{y}}_t | \hat{\mathbf{y}}_{< t}, \mathbf{x}, \mathcal{I}; \theta)$$

$$= -\sum_{t=1}^{T} P(\mathbf{y}_t | \mathbf{y}_{< t}, \mathbf{x}, \mathcal{I}; \theta) - \sum_{t=T+1}^{T+R} P(\mathbf{r}_t | \mathbf{r}_{< t}, \mathbf{y}, \mathbf{x}, \mathcal{I}; \theta)$$

$$= -\log P(\mathbf{y} | \mathbf{x}, \mathcal{I}; \theta) - \log P(\mathbf{r} | \mathbf{y}, \mathbf{x}, \mathcal{I}; \theta)$$
(4)

Here, the first term is a traditional MT loss, which trains the model to acquire new translation knowledge. The second term minimizes the negative log-likelihood of the self-generated rationale **r** given the conventional translation instruction-response pair. It can be interpreted as a sequence-level self-distillation loss on the rationale tokens, which serves as a regularizer to mitigate forgetting by preventing excessive deviation of model parameters.

4 EXPERIMENTS

4.1 Datasets

The datasets and benchmarks used for fine-tuning and evaluation are listed below:

Translation. For parallel training data, we adopt the human written data collected by ALMA (Xu et al., 2024a), as it has been proven effective in enhancing the translation proficiency of LLMs. This data comprises human written test datasets from WMT'17 to WMT'20, plus the development and test sets from Flores-200 (Goyal et al., 2022). It covers 4 English-centric language pairs, considering

both from English and to English directions: Czech (cs), Chinese (zh), German (de), and Russian (ru). The WMT'22 test dataset for the same 8 translation directions is used for testing. Translation performance is evaluated using the COMET metric (Unbabel/wmt22-comet-da) due to its better alignment with human evaluations (Rei et al., 2022).

Conversation and Instruction Following. MT-Bench (Zheng et al., 2023) and AlpacaE-val (Dubois et al., 2024) are employed to evaluate the conversation and instruction-following abilities of the models. MT-Bench consists of a set of challenging multi-turn questions across various categories, including math, coding, role-play, and writing. GPT-4 is utilized as the judge to assess the quality of the models' responses, scoring them on a scale of 1 to 10, as outlined by Zheng et al. (2023). The AlpacaEval and AlpacaEval 2.0 leaderboard evaluates the models on 805 prompts from the AlpacaEval dataset and calculates the win rate against text-davinci-003 and GPT-4-1106. For this evaluation, we use the weighted_alpaca_eval_gpt4_turbo annotator as the judge.

Safety. Safety is evaluated using harmful behavior datasets consisting of unsafe prompts. Following WalledEval (Gupta et al., 2024), we feed 520 unsafe prompts from AdvBench (Zou et al., 2023) into the LLMs and utilize LLaMA-3-Guard-8B (Dubey et al., 2024) to assess whether the responses are harmful. We report the safe rate, defined as the percentage of safe responses across all prompts.

Reasoning. The reasoning ability is evaluated using GSM8K (Cobbe et al., 2021), which comprises 8.8k high-quality arithmetic word problems designed at the grade school level, to assess the arithmetic reasoning abilities of LLMs. The evaluations are conducted using lm-evaluation-harness (Gao et al., 2024) and the exact match scores are reported.

4.2 Baselines

Our method is compared against two baseline categories. The first category includes representative continual instruction tuning (CIT) methods, that are compatible with our setting. In the second category, we consider prior LLM-based MT models, which focus on enhancing the translation proficiency of LLMs. It's worth noting that the comparison with prior LLM-based MT models is not entirely fair due to discrepancies in training data and model architectures.

Continual Instruction Tuning (CIT) Baselines. The following continual instruction tuning approaches are introduced as baseline methods: (1) **Vanilla Fine-tuning**, where the backbone LLMs are directly fine-tuned using translation data; (2) **Seq-KD**, which employs sequence-level knowledge distillation along with fine-tuning to alleviate forgetting; (3) **SDFT** (Yang et al., 2024), which leverages the backbone LLM to paraphrase the original training data and fine-tunes the model using the synthesized data.

Prior LLM-based MT models. This category contains several notable works in the field of LLM-based machine translation. **ParroT** (Jiao et al., 2023), which fine-tune LLaMA-1 with a hybrid of translation and instruction-following data. **BigTrans** (Yang et al., 2023) enhances LLaMA-1 by equipping it with multilingual translation capabilities across more than 100 languages. **BayLing** (Zhang et al., 2023) fine-tunes LLaMA-1 using automatically generated interactive translation instructions. **ALMA** (Xu et al., 2024a) first fine-tunes LLaMA-2 on monolingual data and subsequently uses high-quality parallel data for instruction tuning.

Please refer to Appendix A for further details of the baselines.

4.3 Training Details

In our experiments, we employ LLaMA-2-7B-Chat (Touvron et al., 2023) and Mistral-7B-Instruct-v0.2 (Jiang et al., 2023) as the backbone LLMs. Given the constraints of our computational resources, the Low-Rank Adaptation (LoRA) technique (Hu et al., 2022) is utilized in most of our experiments. Specifically, a LoRA adapter with a rank of 16 is integrated into all the linear layers of the LLMs and exclusively trains the adapter. The LLMs are fine-tuned for three epochs on the translation dataset, with a learning rate of 1×10^{-4} and a cosine annealing schedule. The batch

is set to 128 for stable training. Our implementation is based on LLaMA-Factory (Zheng et al., 2024). After the fine-tuning phase, the LoRA module is merged into the backbone LLM for testing. For further details, please refer to Appendix B.

4.4 RESULTS

Table 1: The overall translation performance (COMET score) in $EN \rightarrow X$. The delta performance compared to the backbone LLM is shown.

Models	Czech	German	Russian	Chinese	Avg.	
	Вас	ckbone LLM: LLa	ıMA-2-7B-Chat			
Backbone LLM	70.14	75.10 75.76		72.57	73.39	
w/ Vanilla-FT	$81.80 \uparrow 11.66$	$82.81 \uparrow 7.71$	$84.67 \uparrow 8.91$	81.96 \(\gamma\) 9.39	$82.81 \uparrow 9.42$	
w/ Seq-KD	$70.17 \uparrow 0.03$	$74.40 \downarrow 0.7$	$75.62 \downarrow 0.14$ $72.93 \uparrow 0.36$		$73.28 \downarrow 0.11$	
w/ SDFT	$68.59 \downarrow 1.55$	$75.21 \uparrow 0.11$	$79.67 \uparrow 3.91$ $78.45 \uparrow 5.88$		$75.48 \uparrow 2.09$	
w/ RaDis (Ours)	$81.77 \uparrow 11.63$	$82.39 \uparrow 7.29$	84.31 ↑ 8.55	$81.98 \uparrow 9.41$	82.61 ↑ 9.22	
	Backb	one LLM: Mistra	l-7B-Instruct-v0.	2		
Backbone LLM	67.39	67.87	64.56		67.79	
w/ Vanilla-FT	w/ Vanilla-FT 84.33 ↑ 16.94		$86.23 \uparrow 21.67$	$83.63 \uparrow 12.31$	84.31 ↑ 16.52	
w/ Seq-KD	v/ Seq-KD 74.30 ↑ 6.91		$73.10 \uparrow 8.54$	$78.28 \uparrow 6.96$	$74.84 \uparrow 7.06$	
w/ SDFT	w/ SDFT 51.90 \ 15.49		47.07 ↓ 17.49	56.38 \ 14.94	52.17 \(\psi \) 15.62	
w/ RaDis (Ours)	$84.32 \uparrow 16.93$	$82.95 \uparrow 15.08$	86.55 ↑ 21.99	$83.75 \uparrow 12.43$	84.39 ↑ 16.61	
		Prior LLM-based	l MT Models			
ParroT	-	81.20	-	79.30	-	
BigTrans	80.65	78.81	78.21	81.31	79.75	
BayLing-7B	76.85	82.18	74.72	84.43	79.55	
ALMA-7B	89.05	85.45	87.05	84.87	86.61	

Table 2: The overall translation performance (COMET score) in $X \rightarrow EN$. The delta performance compared to the backbone LLM is shown.

Models	Czech	German	German Russian		Avg.	
	Ва	ickbone LLM: LL	aMA-2-7B-chat			
Backbone LLM	ckbone LLM 79.53		81.20 80.36		79.01	
w/ Vanilla-FT	$82.74 \uparrow 3.21$	$83.31 \uparrow 2.11$	$82.70 \uparrow 2.34$	$78.08 \uparrow 3.13$	$81.71 \uparrow 2.7$	
w/ Seq-KD	$78.50 \downarrow 1.03$	$80.61 \downarrow 0.59$	$79.88 \downarrow 0.48$	$74.48 \downarrow 0.47$	$78.37 \downarrow 0.64$	
w/ SDFT	$81.93 \uparrow 2.4$	$82.60 \uparrow 1.4$	$81.87 \uparrow 1.51$	$76.77 \uparrow 1.82$	$80.79 \uparrow 1.78$	
w/ RaDis (Ours)	$81.75 \uparrow 2.22$	$83.07 \uparrow 1.87$	$82.22 \uparrow 1.86$	$77.83 \uparrow 2.88$	$81.22 \uparrow 2.21$	
	Backl	bone LLM: Mistra	al-7B-Instruct-v0	.2		
Backbone LLM 81.88		81.73	81.73 81.97 77		80.84	
w/ Vanilla-FT	w/ Vanilla-FT 83.51 ↑ 1.63		$83.23 \uparrow 1.26$	$79.21 \uparrow 1.45$	82.33 ↑ 1.49	
w/ Seq-KD	81.66 \ 0.22 81.9		$82.50 \uparrow 0.53$	$77.49 \downarrow 0.27$	$80.91 \uparrow 0.07$	
w/ SDFT	0FT 80.38 ↓ 1.5		$80.21 \downarrow 1.76$	$80.21 \downarrow 1.76$ $77.39 \downarrow 0.37$		
w/ RaDis (Ours)	$82.41 \uparrow 0.53$	$82.86 \uparrow 1.13$	$83.32 \uparrow 1.35$	$79.17 \uparrow 1.41$	$81.94 \uparrow 1.1$	
		Prior LLM-base	d MT Models			
ParroT	ParroT -		- 75.20		-	
BigTrans	81.19	80.68	77.80 74.26		78.48	
BayLing-7B	82.03 83.19		82.48	77.48	81.30	
ALMA-7B	85.93	83.95	84.84	79.78	83.63	

The translation performance in $EN \rightarrow X$ and $X \rightarrow EN$ are shown in Table 1 and Table 2, respectively. The performance on general ability, including instruction following, safety, and reasoning, is shown in Table 3.

Fine-tuning is a double-edged sword. In the EN \rightarrow X direction, Vanilla-FT significantly enhances translation performance compared to zero-shot results, achieving an average COMET score improvement of **+16.52**. In the X \rightarrow EN direction, the performance improvement is relatively small (**+1.49** COMET). This is mainly because the backbone LLMs already have a strong ability to translate to English. However, this improvement in translation proficiency comes at the cost of a substantial decline in general capabilities, as reflected by the sharp performance drop in instruction-following, safety, and reasoning benchmarks.

RaDis balances translation proficiency and general abilities. The translation results of SDFT fall below the zero-shot performance of backbone LLM when using Mistral-7B-Instruct-v0.2 as the

Table 3: The performance on instruction following, safety, and reasoning benchmarks. **RP** represents relative performance compared to the backbone LLM and is only calculated for CIT methods. The delta performance compared to vanilla fine-tuning (Vanilla-FT) is shown. The safety rate for **BigTrans** and **ALMA** is omitted, as these translation-specific models can not generate reasonable responses.

Models	Conversation and Instruction Following			Safety	Reasoning	RP[%]	
	MT-bench	ch AlpacaEval AlpacaEv		AdvBench	GSM8K	KI [//J	
		Backbo	ne LLM: LLaMA-2-7	B-chat			
Backbone LLM	6.51	71.40	9.66	100.00	21.83	-	
w/ Vanilla-FT	1.5	2.18	0.71	37.88	4.32	18.22	
w/ Seq-KD	$6.59 \uparrow 5.09$	$67.48 \uparrow 65.30$	$8.33 \uparrow 7.62$	$100.00 \uparrow 62.12$	$19.48 \uparrow 15.16$	94.24 ↑ 76.02	
w/ SDFT	5.66 ↑ 4.16	67.55 ↑ 65.37	$7.09 \uparrow 6.38$	$98.08 \uparrow 60.20$	$20.02 \uparrow 15.70$	88.95 ↑ 70.72	
w/ RaDis	$6.56 \uparrow 5.06$	$67.94 \uparrow 65.76$	$7.47 \uparrow 6.76$	$100.00 \uparrow 62.12$	$19.48 \uparrow 15.16$	92.50 ↑ 74.27	
		Backbone I	LLM: Mistral-7B-Ins	struct-v0.2			
Backbone LLM	7.67	84.91	15.09	68.46	41.62	-	
w/ Vanilla-FT	1.94	6.07	1.02	4.23	0.23	9.19	
w/ Seq-KD	$6.99 \uparrow 5.05$	82.06 \(\phi\) 75.99	$12.7 \uparrow 11.68$	$60.58 \uparrow 56.35$	41.77 ↑ 41.54	92.16 ↑ 82.97	
w/ SDFT	$7.00 \uparrow 5.06$	$78.32 \uparrow 72.25$	$10.02 \uparrow 9.00$	48.27 ↑ 44.04	$41.09 \uparrow 40.86$	83.83 ↑ 74.64	
w/ RaDis	7.57 ↑ 5.63	$80.34 \uparrow 74.27$	$11.05 \uparrow 10.03$	$62.12 \uparrow 57.89$	$41.70 \uparrow 41.47$	91.49 ↑ 82.31	
		Prior	r LLM-based MT mo	dels			
ParroT	4.58	28.06	2.82	26.35	4.09	-	
BigTrans	1.73	0.42	0.22	-	0	-	
BayLing-7B	4.51	51.29	4.43	84.62	5.38	-	
ALMA-7B	2.80	1.08	0.17	-	0	-	

backbone LLM. This under-performance stems from the fact that the prompt used for rewriting data is tailored for LLaMA-2 models, which does not generalize well to Mistral models. Additionally, SDFT shows weaker performance in $EN\rightarrow X$ translations compared to $X\rightarrow EN$, indicating that the limited ability of the backbone LLM to translate into other languages diminishes the quality of the distilled dataset. Seq-KD preserves up to 94.24% of the overall general capabilities but brings almost no improvement in translation performance. In contrast, RaDis strikes a better balance between translation proficiency and general ability. It achieves a COMET score comparable to Vanilla-FT (81.58 vs. 82.02, 83.17 vs. 83.56) while preserving up to 92.50% of the general capabilities.

Compared with prior LLM-based MT models. RaDis helps backbone models perform comparably with SOTA LLM-based MT models in translation performance. Our best model (Mistral-7B-Instruct-v0.2 w/ RaDis) surpasses BigTrans, BayLing, and ParroT by a considerable margin in average COMET scores, particularly in the EN \rightarrow X direction. Although ALMA achieves a higher COMET score than our best model, it benefits from continual pre-training on massive monolingual data, which is not implemented in our approach. Regarding general ability, models equipped with RaDis significantly outperform all prior studies. Translate-specific models, such as BigTrans and ALMA that are only fine-tuned with translation data, lack general ability. While ParroT and BayLing utilize Alpaca data in training, their general ability is limited by their backbone models and the quality of Alpaca data. In contrast, RaDis preserves the strong general ability of the backbone LLMs, achieving the highest performance.

5 ANALYSIS

5.1 DO RATIONALES CONTAIN GENERAL KNOWLEDGE?

To investigate the content of self-generated rationales, we randomly sampled 25 instances from each translation direction, forming a set of 200 for analysis. The content of the rationales included diverse information, as expected. As shown in Table 4, the information can be broadly categorized into eight types, ranging from word alignments to factual knowledge. A rationale can contain multiple kinds of information at the same time, which constitutes an effective supplement to the reference sentence in terms of general knowledge. For examples of rationales, please refer to Appendix C.

Table 4: Rationale categories and their main contents. Note that the percentages do not sum to 100%, as each rationale may include multiple categories of information.

Information Category	Contents	Occurrence [%]
Word/phrase translation	Translations of individual words and phrases in the sentence.	29.5
Alternative translation	Multiple translation options provided for selection.	19.5
Helpful&Safety	Guidance on helpful and safe practices when translating sensitive sentences.	17.5
Semantic explanation	Clarification of the sentence's meaning.	15.5
Back-translation	Back-translations of non-English results to verify their accuracy.	12.5
Factual supplement	Additional factual information regarding entities or events in the sentence.	9.0
Word/phrase explanation	Explanations for special words, idioms, or expressions.	7.5
Grammar	Information on grammar, such as part-of-speech or sentence structure.	5.5

Table 5: The result of ablation study. The names in brackets are the models used to generate rationales. The best results in different RaDis variants are highlighted in bold.

Models	Machine Translation		Conversation and Instruction Following			Safety	Reasoning
	X→EN	EN→X	MT-bench	AlpacaEval	AlpacaEval 2.0	AdvBench	GSM8K
Mistral-7B-Instruct-v0.2	80.84	67.79	7.67	84.91	15.09	68.46	41.62
w/ Vanilla-FT	82.33	84.31	1.94	6.07	1.02	4.23	0.23
w/ RaDis (Self-generated)	81.94	84.39	7.57	80.34	11.05	62.12	41.70
w/ RaDis (LLaMA-2-Chat-7B)	82.33	84.51	6.89	63.85	6.28	98.46	35.03
w/ RaDis (LLaMA-3-70B-Instruct)	82.84	84.71	7.00	77.41	10.27	58.27	39.42

5.2 WHICH IS THE KEY: RATIONAL QUALITY OR SELF-DISTILLATION PROPERTY?

The effectiveness of RaDis can be explained in two ways: rationale quality (in terms of the knowledge they contain) and the self-distillation property. We conducted the following ablation experiment to analyze the impact of these two factors. Specifically, the self-generated rationales in RaDis were replaced by rationales generated by different models, namely LLaMA-2-7B-Chat and LLaMA-3-70B-Instruct (Dubey et al., 2024). Due to the difference in parameter size and fine-tuning data, these models can provide rationales with varying levels of quality, but all lack the self-distillation property. Therefore, it is possible to separate the rationale quality and the self-distillation property to analyze their contributions.

As shown in Table 5, RaDis consistently mitigates the forgetting of general capabilities, regardless of the type of rationales used. When comparing rationales generated by LLaMA-2-7B-Chat and LLaMA-3-70B-Instruct, the latter demonstrates superior performance in both MT and general tasks, except for the safety task. These results suggest that models can learn stronger general capabilities through higher-quality rationales, which leads to better overall performance. However, self-generated rationales demonstrate the strongest ability to retain general capabilities, even outperforming those generated by LLaMA-3-70B-Instruct, highlighting the importance of the self-distillation property.

5.3 RADIS AVOIDS THE CONFLICT BETWEEN LEARNING AND MITIGATING CF

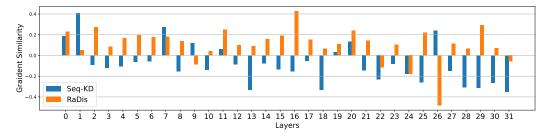


Figure 4: Overview of the gradient similarity between the regularization term and MT loss.

As demonstrated in Section 3.3, our proposed RaDis can be viewed as a specialized form of sequence-level distillation, where the rationale r serves as the distillation target. However, while

both methods excel at preserving general capabilities, RaDis notably enhances translation proficiency, whereas Seq-KD does not. We posit that the difference arises from whether the regularization term conflicts with the MT learning process. In Seq-KD (Equation 5), the MT loss $-\log P(\mathbf{y}|\mathbf{x},\mathcal{I};\theta)$ and the regularization term $-\log P(\mathbf{y}'|\mathbf{x},\mathcal{I};\theta)$ share the same input but have different outputs, which may lead to conflict in optimization. In contrast, with RaDis (Equation 4), the MT loss and the regularization term $-\log P(\mathbf{r}|\mathbf{y},\mathbf{x},\mathcal{I};\theta)$ are less likely to exhibit this issue.

We analyze gradient similarity to validate our assumption. Specifically, we sample 128 examples from each translation direction to create a validation set consisting of 1024 samples. Subsequently, the gradient features for the MT loss and the regularization term for both methods are extracted, following Xia et al. (2024). Finally, the cosine similarity of the gradient features is computed. As depicted in Figure 4, in 24 out of 32 layers, the gradient of the regularization term for Seq-KD exhibits negative similarity with the MT loss, indicating a significant conflict between these objectives. In contrast, in 25 out of 32 layers, the gradient of RaDis' regularization term shows positive similarity with the MT loss, suggesting that RaDis can avoid the conflict between learning and mitigating forgetting.

6 CONCLUSIONS

In this paper, we conducted a systematic evaluation of prior LLM-based MT models. Our findings indicate that prior LLM-based MT models lack diverse general capabilities, degenerating into task-specific translation models. This degeneration is mainly caused by catastrophic forgetting while fine-tuning for translation tasks. Previous continual learning approaches can not preserve the general capabilities gained from in-house training data. To address this issue, we propose a simple yet effective strategy, RaDis. RaDis prompts LLMs to generate rationales for the reference translation and utilizes these rationales as replay data to mitigate forgetting in a self-distillation manner. Extensive experiments show that SDFT greatly enhances the translation performance while preserving the models' general ability. Further analysis indicates that self-generated rationales not only encapsulate diverse general knowledge but also avoid the conflict between learning and mitigating CF, making them an ideal choice for distillation. These insights can help future research on building LLMs capable of excelling in specialized tasks without compromising their generality or safety.

7 LIMITATIONS AND FUTURE WORK

Our study is subject to certain limitations. Owing to constraints in computational resources, we adopt LoRA on models with 7B parameters. Further investigations involving larger models and full fine-tuning remain to be explored. Furthermore, we predominately focus on fine-tuning with machine translation data, applying RaDis to other NLP tasks will further support its effectiveness. This potential direction is what we intend to explore in future work.

REPRODUCIBILITY STATEMENT

Codes and model weights will be made public after review to advocate future research. For synthesizing data, we provide several examples in Appendix C. For evaluation, we primarily use greedy decoding to ensure reproducibility, except where specific generation configurations are mandated by certain benchmark tools. Note that evaluations on instruction-following abilities (AlpacaEval and MT-Bench) rely on OpenAI's API. The randomness of API responses may have little impact on the reproducibility of these benchmarks.

REFERENCES

Zhiyuan Chen and Bing Liu. *Lifelong Machine Learning, Second Edition*. Synthesis Lectures on Artificial Intelligence and Machine Learning. Morgan & Claypool Publishers, 2018. ISBN 978-3-031-00453-7. doi: 10.2200/S00832ED1V01Y201802AIM037. URL https://doi.org/10.2200/S00832ED1V01Y201802AIM037.

Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John

Schulman. Training verifiers to solve math word problems. *CoRR*, abs/2110.14168, 2021. URL https://arxiv.org/abs/2110.14168.

Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurélien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Rozière, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny Livshits, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Graeme Nail, Grégoire Mialon, Guan Pang, Guillem Cucurell, Hailey Nguyen, Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel M. Kloumann, Ishan Misra, Ivan Evtimov, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, and et al. The llama 3 herd of models. CoRR, abs/2407.21783, 2024. doi: 10.48550/ARXIV.2407.21783. URL https://doi.org/10.48550/arXiv.2407.21783.

Yann Dubois, Balázs Galambosi, Percy Liang, and Tatsunori B. Hashimoto. Length-controlled alpacaeval: A simple way to debias automatic evaluators. CoRR, abs/2404.04475, 2024. doi: 10. 48550/ARXIV.2404.04475. URL https://doi.org/10.48550/arXiv.2404.04475.

Robert M. French. Catastrophic interference in connectionist networks: Can it be predicted, can it be prevented? In Jack D. Cowan, Gerald Tesauro, and Joshua Alspector (eds.), Advances in Neural Information Processing Systems 6, [7th NIPS Conference, Denver, Colorado, USA, 1993], pp. 1176-1177. Morgan Kaufmann, 1993. URL http://papers.nips.cc/paper/ 799-catastrophic-interference-in-connectionist-networks-can-it-be-predicted-can-it

Yao Fu, Hao Peng, Litu Ou, Ashish Sabharwal, and Tushar Khot. Specializing smaller language models towards multi-step reasoning. In Andreas Krause, Emma Brunskill, Kyunghyun Cho, Barbara Engelhardt, Sivan Sabato, and Jonathan Scarlett (eds.), International Conference on Machine Learning, ICML 2023, 23-29 July 2023, Honolulu, Hawaii, USA, volume 202 of Proceedings of Machine Learning Research, pp. 10421-10430. PMLR, 2023. URL https://proceedings.mlr.press/v202/fu23d.html.

Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Alain Le Noac'h, Haonan Li, Kyle McDonell, Niklas Muennighoff, Chris Ociepa, Jason Phang, Laria Reynolds, Hailey Schoelkopf, Aviya Skowron, Lintang Sutawika, Eric Tang, Anish Thite, Ben Wang, Kevin Wang, and Andy Zou. A framework for few-shot language model evaluation, 07 2024. URL https://zenodo.org/records/ 12608602.

Naman Goyal, Cynthia Gao, Vishrav Chaudhary, Peng-Jen Chen, Guillaume Wenzek, Da Ju, Sanjana Krishnan, Marc'Aurelio Ranzato, Francisco Guzmán, and Angela Fan. The flores-101 evaluation benchmark for low-resource and multilingual machine translation. Trans. Assoc. Comput. Linguistics, 10:522–538, 2022. doi: 10.1162/TACL_A_00474. URL https: //doi.org/10.1162/tacl_a_00474.

Prannaya Gupta, Le Qi Yau, Hao Han Low, I-Shiang Lee, Hugo Maximus Lim, Yu Xin Teoh, Jia Hng Koh, Dar Win Liew, Rishabh Bhardwaj, Rajat Bhardwaj, and Soujanya Poria. Walledeval: A comprehensive safety evaluation toolkit for large language models. CoRR, abs/2408.03837, 2024. doi: 10.48550/ARXIV.2408.03837. URL https://doi.org/10.48550/arXiv.2408. 03837.

Yongquan He, Xuancheng Huang, Minghao Tang, Lingxun Meng, Xiang Li, Wei Lin, Wenyuan Zhang, and Yifu Gao. Don't half-listen: Capturing key-part information in continual instruction

- tuning. *CoRR*, abs/2403.10056, 2024. doi: 10.48550/ARXIV.2403.10056. URL https://doi.org/10.48550/arXiv.2403.10056.
- Cheng-Yu Hsieh, Chun-Liang Li, Chih-Kuan Yeh, Hootan Nakhost, Yasuhisa Fujii, Alex Ratner, Ranjay Krishna, Chen-Yu Lee, and Tomas Pfister. Distilling step-by-step! outperforming larger language models with less training data and smaller model sizes. In Anna Rogers, Jordan L. Boyd-Graber, and Naoaki Okazaki (eds.), *Findings of the Association for Computational Linguistics: ACL 2023, Toronto, Canada, July 9-14, 2023*, pp. 8003–8017. Association for Computational Linguistics, 2023. doi: 10.18653/V1/2023.FINDINGS-ACL.507. URL https://doi.org/10.18653/v1/2023.findings-acl.507.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. In *The Tenth International Conference on Learning Representations, ICLR* 2022, *Virtual Event, April* 25-29, 2022. OpenReview.net, 2022. URL https://openreview.net/forum?id=nZeVKeeFYf9.
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de Las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, Lélio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. Mistral 7b. *CoRR*, abs/2310.06825, 2023. doi: 10.48550/ARXIV.2310.06825. URL https://doi.org/10.48550/arXiv.2310.06825.
- Wenxiang Jiao, Jen-tse Huang, Wenxuan Wang, Zhiwei He, Tian Liang, Xing Wang, Shuming Shi, and Zhaopeng Tu. Parrot: Translating during chat using large language models tuned with human translation and feedback. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), Findings of the Association for Computational Linguistics: EMNLP 2023, Singapore, December 6-10, 2023, pp. 15009–15020. Association for Computational Linguistics, 2023. doi: 10.18653/V1/2023.FINDINGS-EMNLP.1001. URL https://doi.org/10.18653/v1/2023.findings-emnlp.1001.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with pagedattention. In Jason Flinn, Margo I. Seltzer, Peter Druschel, Antoine Kaufmann, and Jonathan Mace (eds.), *Proceedings of the 29th Symposium on Operating Systems Principles, SOSP 2023, Koblenz, Germany, October 23-26, 2023*, pp. 611–626. ACM, 2023. doi: 10.1145/3600006.3613165. URL https://doi.org/10.1145/3600006.3613165.
- Jisoo Mok, Jaeyoung Do, Sungjin Lee, Tara Taghavi, Seunghak Yu, and Sungroh Yoon. Large-scale lifelong learning of in-context instructions and how to tackle it. In Anna Rogers, Jordan L. Boyd-Graber, and Naoaki Okazaki (eds.), *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2023, Toronto, Canada, July 9-14, 2023*, pp. 12573–12589. Association for Computational Linguistics, 2023. doi: 10.18653/V1/2023.ACL-LONG.703. URL https://doi.org/10.18653/v1/2023.acl-long.703.
- Ricardo Rei, José G. C. de Souza, Duarte M. Alves, Chrysoula Zerva, Ana C. Farinha, Taisiya Glushkova, Alon Lavie, Luísa Coheur, and André F. T. Martins. COMET-22: unbabel-ist 2022 submission for the metrics shared task. In Philipp Koehn, Loïc Barrault, Ondrej Bojar, Fethi Bougares, Rajen Chatterjee, Marta R. Costa-jussà, Christian Federmann, Mark Fishel, Alexander Fraser, Markus Freitag, Yvette Graham, Roman Grundkiewicz, Paco Guzman, Barry Haddow, Matthias Huck, Antonio Jimeno-Yepes, Tom Kocmi, André Martins, Makoto Morishita, Christof Monz, Masaaki Nagata, Toshiaki Nakazawa, Matteo Negri, Aurélie Névéol, Mariana Neves, Martin Popel, Marco Turchi, and Marcos Zampieri (eds.), *Proceedings of the Seventh Conference on Machine Translation, WMT 2022, Abu Dhabi, United Arab Emirates (Hybrid), December 7-8, 2022*, pp. 578–585. Association for Computational Linguistics, 2022. URL https://aclanthology.org/2022.wmt-1.52.
- Thomas Scialom, Tuhin Chakrabarty, and Smaranda Muresan. Fine-tuned language models are continual learners. In Yoav Goldberg, Zornitsa Kozareva, and Yue Zhang (eds.), *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing, EMNLP*

- 2022, Abu Dhabi, United Arab Emirates, December 7-11, 2022, pp. 6107–6122. Association for Computational Linguistics, 2022. doi: 10.18653/V1/2022.EMNLP-MAIN.410. URL https://doi.org/10.18653/v1/2022.emnlp-main.410.
- Haizhou Shi, Zihao Xu, Hengyi Wang, Weiyi Qin, Wenyuan Wang, Yibin Wang, and Hao Wang. Continual learning of large language models: A comprehensive survey. *CoRR*, abs/2404.16789, 2024. doi: 10.48550/ARXIV.2404.16789. URL https://doi.org/10.48550/arXiv.2404.16789.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton-Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurélien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and finetuned chat models. *CoRR*, abs/2307.09288, 2023. doi: 10.48550/ARXIV.2307.09288. URL https://doi.org/10.48550/arxiv.2307.09288.
- Somin Wadhwa, Silvio Amir, and Byron C. Wallace. Investigating mysteries of cot-augmented distillation. *CoRR*, abs/2406.14511, 2024. doi: 10.48550/ARXIV.2406.14511. URL https://doi.org/10.48550/arXiv.2406.14511.
- Peifeng Wang, Zhengyang Wang, Zheng Li, Yifan Gao, Bing Yin, and Xiang Ren. SCOTT: self-consistent chain-of-thought distillation. In Anna Rogers, Jordan L. Boyd-Graber, and Naoaki Okazaki (eds.), *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, ACL 2023, Toronto, Canada, July 9-14, 2023, pp. 5546–5558. Association for Computational Linguistics, 2023. doi: 10.18653/V1/2023.ACL-LONG. 304. URL https://doi.org/10.18653/v1/2023.acl-long.304.
- Yifan Wang, Yafei Liu, Chufan Shi, Haoling Li, Chen Chen, Haonan Lu, and Yujiu Yang. Inscl: A data-efficient continual learning paradigm for fine-tuning large language models with instructions. In Kevin Duh, Helena Gómez-Adorno, and Steven Bethard (eds.), *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers), NAACL 2024, Mexico City, Mexico, June 16-21, 2024*, pp. 663–677. Association for Computational Linguistics, 2024. doi: 10.18653/V1/2024. NAACL-LONG.37. URL https://doi.org/10.18653/v1/2024.naacl-long.37.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In Sanmi Koyejo, S. Mohamed, A. Agarwal, Danielle Belgrave, K. Cho, and A. Oh (eds.), Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 December 9, 2022, 2022. URL http://papers.nips.cc/paper_files/paper/2022/hash/9d5609613524ecf4f15af0f7b31abca4-Abstract-Conference.html.
- Tongtong Wu, Linhao Luo, Yuan-Fang Li, Shirui Pan, Thuy-Trang Vu, and Gholamreza Haffari. Continual learning for large language models: A survey. *CoRR*, abs/2402.01364, 2024. doi: 10. 48550/ARXIV.2402.01364. URL https://doi.org/10.48550/arXiv.2402.01364.
- Mengzhou Xia, Sadhika Malladi, Suchin Gururangan, Sanjeev Arora, and Danqi Chen. LESS: selecting influential data for targeted instruction tuning. In *Forty-first International Conference on Machine Learning, ICML 2024, Vienna, Austria, July 21-27, 2024.* OpenReview.net, 2024. URL https://openreview.net/forum?id=PG5fV50maR.

- Weimin Xiong, Yifan Song, Peiyi Wang, and Sujian Li. Rationale-enhanced language models are better continual relation learners. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pp. 15489–15497. Association for Computational Linguistics, 2023. doi: 10.18653/V1/2023.EMNLP-MAIN.958. URL https://doi.org/10.18653/v1/2023.emnlp-main.958.
- Haoran Xu, Young Jin Kim, Amr Sharaf, and Hany Hassan Awadalla. A paradigm shift in machine translation: Boosting translation performance of large language models. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024a. URL https://openreview.net/forum?id=farT6XXntP.
- Rongwu Xu, Zehan Qi, and Wei Xu. Preemptive answer "attacks" on chain-of-thought reasoning. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar (eds.), Findings of the Association for Computational Linguistics, ACL 2024, Bangkok, Thailand and virtual meeting, August 11-16, 2024, pp. 14708–14726. Association for Computational Linguistics, 2024b. doi: 10. 18653/V1/2024.FINDINGS-ACL.876. URL https://doi.org/10.18653/v1/2024.findings-acl.876.
- Wen Yang, Chong Li, Jiajun Zhang, and Chengqing Zong. Bigtrans: Augmenting large language models with multilingual translation capability over 100 languages. *CoRR*, abs/2305.18098, 2023. doi: 10.48550/ARXIV.2305.18098. URL https://doi.org/10.48550/arXiv.2305.18098.
- Zhaorui Yang, Tianyu Pang, Haozhe Feng, Han Wang, Wei Chen, Minfeng Zhu, and Qian Liu. Self-distillation bridges distribution gap in language model fine-tuning. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar (eds.), *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, *ACL 2024, Bangkok, Thailand, August 11-16, 2024*, pp. 1028–1043. Association for Computational Linguistics, 2024. URL https://aclanthology.org/2024.acl-long.58.
- Wenpeng Yin, Jia Li, and Caiming Xiong. Contintin: Continual learning from task instructions. In Smaranda Muresan, Preslav Nakov, and Aline Villavicencio (eds.), *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, *ACL 2022, Dublin, Ireland, May* 22-27, 2022, pp. 3062–3072. Association for Computational Linguistics, 2022. doi: 10.18653/V1/2022.ACL-LONG.218. URL https://doi.org/10.18653/V1/2022.acl-long.218.
- Shaolei Zhang, Qingkai Fang, Zhuocheng Zhang, Zhengrui Ma, Yan Zhou, Langlin Huang, Mengyu Bu, Shangtong Gui, Yunji Chen, Xilin Chen, and Yang Feng. Bayling: Bridging cross-lingual alignment and instruction following through interactive translation for large language models. *CoRR*, abs/2306.10968, 2023. doi: 10.48550/ARXIV.2306.10968. URL https://doi.org/10.48550/arXiv.2306.10968.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric P. Xing, Hao Zhang, Joseph E. Gonzalez, and Ion Stoica. Judging Ilm-as-a-judge with mt-bench and chatbot arena. In Alice Oh, Tristan Naumann, Amir Globerson, Kate Saenko, Moritz Hardt, and Sergey Levine (eds.), Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 16, 2023, 2023. URL http://papers.nips.cc/paper_files/paper/2023/hash/91f18a1287b398d378ef22505bf41832-Abstract-Datasets_and_Benchmarks.html.
- Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyan Luo, and Yongqiang Ma. Llamafactory: Unified efficient fine-tuning of 100+ language models. *CoRR*, abs/2403.13372, 2024. doi: 10.48550/ARXIV.2403.13372. URL https://doi.org/10.48550/arXiv.2403.13372.
- Andy Zou, Zifan Wang, J. Zico Kolter, and Matt Fredrikson. Universal and transferable adversarial attacks on aligned language models. *CoRR*, abs/2307.15043, 2023. doi: 10.48550/ARXIV.2307.15043. URL https://doi.org/10.48550/arXiv.2307.15043.

A BASELINE DETAILS

A.1 CONTINUAL INSTRUCTION TUNING BASELINES

Vanilla Fine-tuning. This method directly fine-tunes the backbone LLMs with translation data, without incorporating any mechanism to address the forgetting issue.

Sequence-level Knowledge Distillation (Seq-KD). This method first sends the formatted translation instructions to the backbone LLM and generates outputs y'. The model is trained with both golden references y and the self-generated outputs y'. The overall training objective is:

$$\mathcal{L}_{\text{Seq-KD}} = \mathcal{L}(\mathbf{x}, \mathbf{y}; \theta) + \mathcal{L}(\mathbf{x}, \mathbf{y}'; \theta)$$

$$= -\log P(\mathbf{y}|\mathbf{x}, \mathcal{I}; \theta) - \log P(\mathbf{y}'|\mathbf{x}, \mathcal{I}; \theta)$$
(5)

Self-distillation Fine-tuning (SDFT). (Yang et al., 2024) This method first prompts the backbone LLM to paraphrase the original responses present in the task dataset, yielding a distilled dataset. Subsequently, the distilled dataset, which is used in subsequent fine-tuning, helps narrow the distribution gap between LLM and the original dataset. We adopt the general distillation template provided in their paper to paraphrase the dataset.

A.2 PRIOR LLM-BASED MT MODELS

ParroT (Jiao et al., 2023) reformulates translation data into the instruction-following style and introduces a "Hint" field for incorporating extra requirements to regulate the translation process. It is also fine-tuned on the Alpaca dataset to enhance general ability.

BigTrans (Yang et al., 2023) continual pre-train LLaMA-1-13B with Chinese monolingual data and an extensive parallel dataset encompassing 102 natural languages. They then apply multilingual translation instructions for fine-tuning.

BayLing (Zhang et al., 2023) builds an interactive translation dataset and fine-tune LLaMA-1 models with both interactive translation and instruction-following datasets (Alpaca).

ALMA (Xu et al., 2024a) proposes a new training recipe for building LLM-based MT models, which begins with initial fine-tuning on monolingual data and then progresses to fine-tuning on a select set of high-quality parallel data.

In our experiments, we utilized the 7B models as baselines for ParroT, BayLing, and ALMA, to ensure a fair comparison of model size.

B Training Details

B.1 PROMPT TEMPLATES

In all experiments, we use the original instruction format of the backbone LLM for both rationale generation and fine-tuning. For LLaMA To avoid the overfit on specific instructions. 5 different translation instructions are generated and randomly applied to each sample. The instructions are shown in Figure 5.

B.2 Hyperparameter

Due to the limitation of resources, our experiments utilize the Low-Rank Adaptation (LoRA) technique (Hu et al., 2022). Specifically, we integrate a LoRA adapter with a rank of 16 into all the linear layers of the LLMs and exclusively train the adapter. The LLMs are fine-tuned over three epochs on the translation dataset, which equates to approximately 2,500 steps. We use a learning rate of 1×10^{-4} and a batch size of 128 to ensure stable training across most experiments. An exception is Seq-KD, which requires a batch size of 256 to maintain the same number of training steps. All experiments are performed on 4 NVIDIA A100 80GB GPUs. For data synthesis, we employ

```
Instruction 1:
Could you please translate this sentence from {lang1} to {lang2}?
{sent1}
Instruction 2:
Translate the following sentence from {lang1} to {lang2}:
{sent1}
Instruction 3:
Translate this sentence from {lang1} to {lang2}.
{sent1}
Instruction 4:
Translate from {lang1} to {lang2}:
{sent1}
Instruction 5:
{sent1}
Translate this sentence to {lang2}.
```

Figure 5: The translation instructions.

vllm (Kwon et al., 2023) to facility fast data generation. For evaluation, we primarily use greedy decoding to ensure reproducibility, except where specific generation configurations are mandated by certain benchmark tools.

C RATIONALE EXAMPLES

Several examples of rationales generated by Mistral-7B-Instruct-v0.2 are provided in Figure 7,8,9,10,11,12,13.

Instruction:

Translate this sentence from Czech to English.

Policie celý případ řádně prošetřila a útočníka posléze vypátrala.

Response:

The police investigated the case thoroughly and finally tracked down the assailant.

Rationale:

Explanation:

In this sentence, "policie" means "police," "celý případ" means "the entire case," "řádně prošetřila" means "thoroughly investigated," and "vypátrala" means "tracked down" or "found." The past tense verbs "prošetřila" and "vypátrala" both end in "-la," which is the feminine singular past tense ending in Czech. Since there is no definite article before "policie," it is assumed to be in the neutral form, which is why the verb forms are in the feminine singular. In English, we keep the same meaning but change the word order to "the police investigated the case thoroughly and finally found the assailant."

Figure 6: Example of rationale containing word/phrase translation.

Instruction:

Could you please translate this sentence from Czech to English?

Tak to vypadá, když se lidé za odpočinkem a zábavou přesunou někam, kde je to velmi odlišné od jejich každodenního života.

Response:

This is when people go to a place that is very different from their regular day-to-day life to relax and have fun.

Rationale:

or

It looks like this when people move to a place that is quite different from their everyday life for relaxation and enjoyment.

Figure 7: Example of rationale containing alternative translation.

Instruction:

Translate the following sentence from English to Chinese:

But denuclearization negotiations have stalled.

Response:

但无核化谈判陷入了僵局。

Rationale:

This translation is provided for information purposes only and may not be 100% accurate. It is always recommended to consult a professional translator for important documents or conversations.

Figure 8: Example of rationale containing helpful&safety information.

Instruction:

Translate from English to Czech:

It will support their training.

Response:

Podpoří jejich výcvik.

Rationale:

This sentence means that the action or thing being referred to will help or contribute to the training of the people mentioned.

Figure 9: Example of rationale containing semantic explanation.

Instruction:

Could you please translate this sentence from English to Chinese?

According to their research, a single tea bag can release more than 11.6 billion plastic particles, "which is higher than the plastic load of other earlier foods by several magnitudes".

Response:

根据这项研究显示,他们发现,单一茶袋释出超过116亿颗塑料微粒,"较先前其他食物的塑料负荷量高出好几个级数"。

Rationale:

This sentence translates to:

According to their research, a single tea bag releases over 11.6 billion plastic particles, which is several magnitudes higher than the plastic load of other earlier foods.

Figure 10: Example of rationale containing back-translation.

Instruction:

Translate from English to Czech:

Its second claw was larger, giving rise to the name Hesperonychus which means "western claw."

Response:

Jeho druhý dráp byl větší, a proto byl pojmenován Hesperonychus, což znamená "západní dráp".

Rationale:

This dinosaur was a theropod, a group of dinosaurs that includes meat-eating species. Hesperonychus lived during the Late Cretaceous period, around 75 to 73 million years ago, in what is now the southwestern United States. Its fossils have been found in the Morrison Formation in Colorado and Utah.

Hesperonychus was a relatively small theropod, with an estimated length of about 3 meters (10 feet) and weight of around 30 kilograms (66 pounds). It had a long, low snout and small, sharp teeth, suggesting that it may have been an agile predator that hunted small prey. The most distinctive feature of Hesperonychus was its second toe, which was much larger than the others. This feature gave rise to its name, as "hespero" means "western" and "nychus" means "claw." The large claw was likely used for gripping and holding onto branches or prey, making Hesperonychus a unique and intriguing dinosaur.

Despite its small size, Hesperonychus was an important discovery in the study of dinosaur evolution, as it provided evidence of the diversity of theropod foot structures during the Late Cretaceous period.

Figure 11: Example of rationale containing factual supplement.

Instruction:

Could you please translate this sentence from Czech to English? "I kdyby všechno ostatní na světě bylo špatně, on byl nebroušený diamant, který ozářil každý den", řekl."

Response:

"With everything else that's going wrong with the world, he was that diamond in the rough that was shining bright every day," he said.

Rationale:

This idiomatic expression "diamond in the rough" refers to someone who has great potential or value, despite not being polished or perfect yet.

Figure 12: Example of rationale containing word/phrase explanation.

Instruction:

Wir können froh sein, dass wir diese Zeit längst überwunden haben. Translate this sentence to English.

Response:

We can be glad that we have long overcome this time.

Rationale:

Explanation: The sentence in German means "We can be glad that we have got over this time a long time ago." The past perfect tense "haben überwunden" (have overcome) is used to express that an action was completed in the past. The subjunctive mood "können sein" (can be) is used to express a state of being or a condition. The past participle "überwunden" agrees with the subject "wir" (we) in gender and number. The article "diese" refers to the time mentioned earlier in the sentence. The word "längst" (long) is an adverb that modifies the verb "überwunden" and indicates that the action was completed a long time ago. The sentence in English conveys the same meaning, but uses the past perfect continuous tense "have been glad" to express the same idea of a past state that continues up to the present.

Figure 13: Example of rationale containing grammar information.